


Item		Parameters				
Modules	Model	P2.6 indoor	P2.97indoor	P3.91indoor	P3.91outdoor	P4.81 outdoor
	Pixel Pitch ( mm )	2.6	2.97	3.91	3.91	4.81
	Physical Density ( dot/m2 )	147456	112896	65536	65536	43264
	LED Arrangement	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
	LED Type	SMD1515	SMD2121	SMD2121	SMD1921	SMD1921
	Module Size ( mm )	250*250	250*250	250*250	250*250	250*250
	Module Resolution ( dot )	96*96	84*84	64*64	64*64	52*52
Main Technical Parameters	Viewing Angle	160/160	160/160	160/160	160/160	160/160
	Grey Scale(bit)	16	16	16	16	16
	Refresh Rate(Hz)	3840	3840	3840	3840	3840
	Max.Power Consumption(w/sqm)	550	480	400	600	580
	Ave.Power Consumption(w/sqm)	200	170	150	200	180
	Cabinet Size(mm)	W500*H500*75	W500*H500*75	W500*H500*75	W500*H500*75	W500*H500*75
		W500*H1000*75	W500*H1000*75	W500*H1000*75	W500*H1000*75	W500*H1000*75
	Cabinet Weight(± 0.25Kg)	8.5/13.5	8.5/13.5	8.5/13.5	8.5/13.5	8.5/13.5
	Waterproof Level	IP43	IP43	IP43	IP65	IP65
	Working Environment	Indoor	Indoor	Indoor	Outdoor	Outdoor
	Cabinet Material	Diecasting Aluminum				
	Input Voltage(V)	AC110V-220V+/-10%				
	Input Frequency(Hz)	60				
	Working Temperature(° C)	-20℃~-+60℃				
	Operation Humidity(RH)	10-95%				
	Life Span(H)	100000				
	Control mode	Synchronous				
	Angle Adjustment	Optional				
	Maintainence mode	Rear/Frontal				
	Installation Type	Rental/Fixed				



## SPECIAL FEATURE

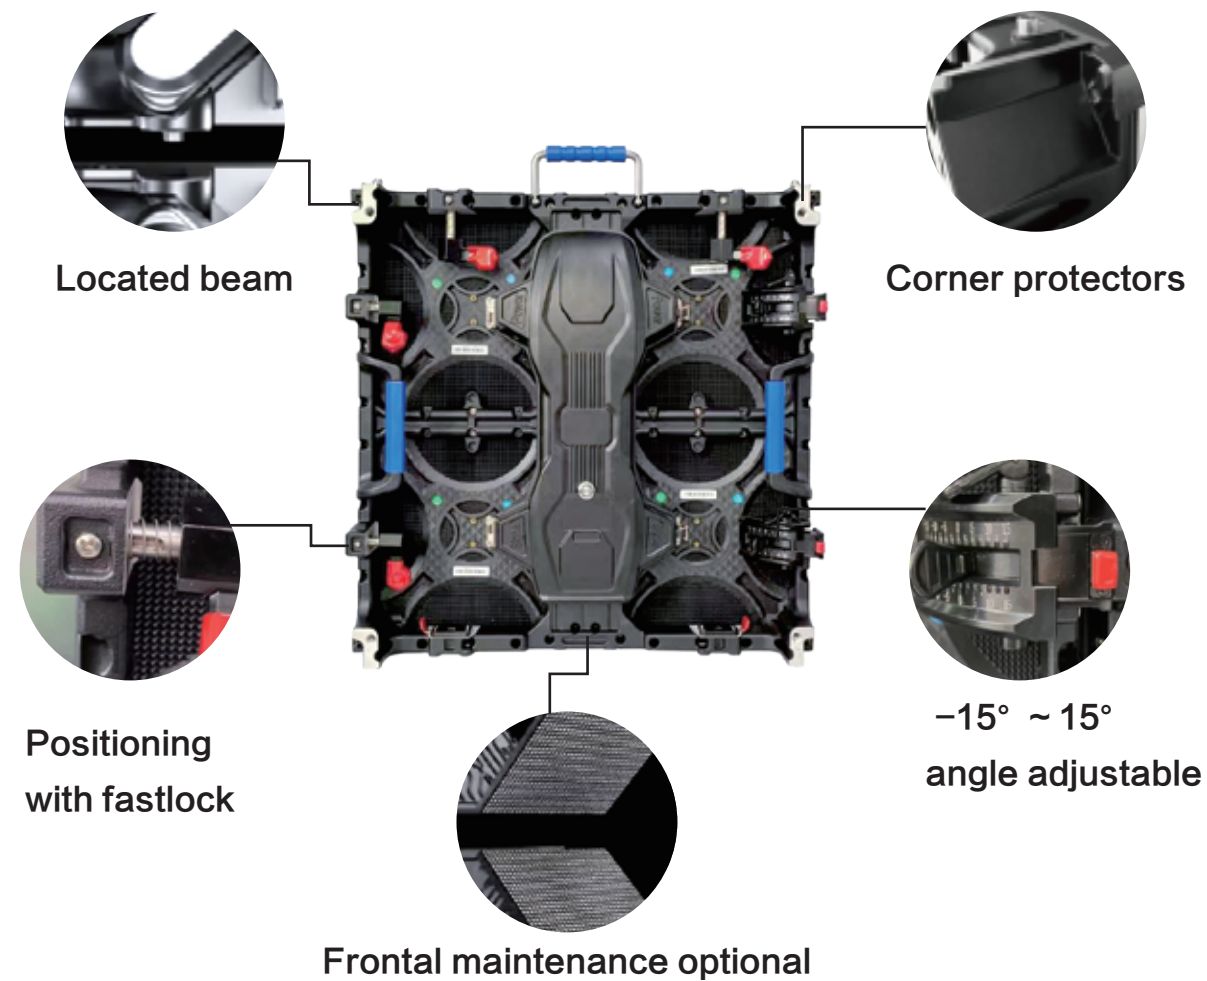

- High refresh rate 3840 with perfect vision effects.
- Die-casting aluminum cabinet, more stable and durable.
- Located beam & fast locks easy for assembling and maintenance.
- 500x 1000mm and 500 x 500mm cabinets can be assembled together horizontally / vertically.
- 90° L shape connection optional.
- -15° ~ 15° curve adjustable.
- Frontal maintenance optional.

## STRUCTURES

