

Parameters

Item		Parameters				
Modules	Model	P0.93	P1.25	P1.56	P1.87	P2.5
	Pixel Pitch (mm)	0.93	1.25	1.56	1.87	2.5
	Physical Density (dot/m2)	113778	64000	409600	284444	160000
	LED Arrangement	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
	LED Type	SMD 1010	SMD 1010	SMD1212	SMD1515	SMD1515
	Module Size (mm)	150*168.75	150*168.75	150*168.75	150*168.75	150*168.75
	Module Resolution (dot)	168*180	120*135	96*108	80*90	60*135
Main Technical Parameters	Viewing Angle	140/120	140/120	140/120	160/140	140/120
	Grey Scale(bit)	16	16	16	16	16
	Refresh Rate(Hz)	3840	3840	3840	3840	3840
	Brightness (d/m2)	500~ 900	500~ 900	500~ 900	500~ 900	500~ 800
	Drive Mode (scan)	1/60	1/45	1/48	1/30	1/30
	Max.Power Consumption(w/sqm)	550	650	650	650	500
	Ave.Power Consumption (w/sqm)	180	200	200	200	170
	Cabinet Size (mm)	600* 337.5*39	600* 337.5*39	600* 337.5*39	600* 337.5*39	600* 337.5*39
	Cabinet Weight (±0.25Kg)	7	7	7	7	7
	Waterproof Level	IP45	IP45	IP45	IP45	IP45
	Working Environment	Indoor	Indoor	Indoor	Indoor	Indoor
	Cabinet Material	Diecasting Aluminum				
	Input Voltage(V)	AC110V-220V+/-10%				
	Input Frequency(Hz)	50/60				
	Working Temperature(° C)	-20℃ ~ +80℃				
	Operation Humidity(RH)	10-95%				
	Life Span(H)	100000				
	Control mode	Synchronous				
	Maintainence mode	Frontal				

SHENZHEN HANMEI PHOTOELECTRIC CO.,LTD

Tel: 0086-755-28050979 Email: INFO@HANMEIGRP.COM

Web : http://www.hanmeigrp.com

SHOWING THE BEAUTY OF THE WORLD

Micro Series


Indoor Fine pitch full color HD Led display



SHENZHEN HANMEI PHOTOELECTRIC CO.,LTD

SHOWING THE BEAUTY OF THE WORLD

Special Feature

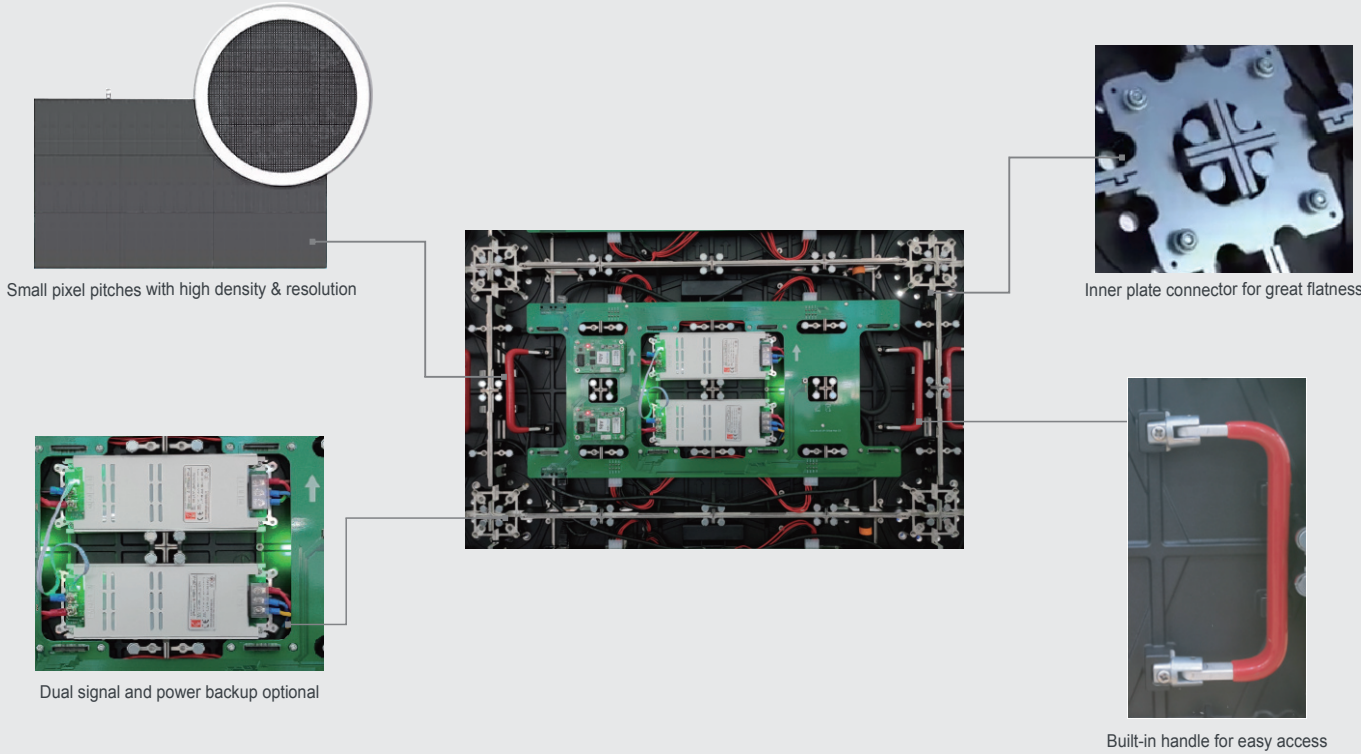

- Small pixel pitches with high density & resolution.
- Slim and light weight design.
- Totally frontal maintenance.
- Die-casting aluminum cabinet, more stable and durable.
- Various installation : stacking and wall mounting,curved mounting optional.

Structures & Application

