

Parameters

Item		Parameters				
Modules	Model	P4	P5t	P6.67	P8	P10
	Pixel Pitch ( mm )	4	5	6.67	8	10
	Physical Density ( dot/m2)	62500	40000t	22460	15625	10000
	LED Arrangement	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
	LED Type	SMD 1921	SMD 2727	SMD 3535	SMD 3535	SMD 3535
	Module Size ( mm )	256*128	320*160	320*160	320*160	320*160
	Module Resolution ( dot )	64*32	64*32	48*24	40*20	32*16
Main Technical Parameters	Viewing Angle	120° (H),60° (V)	120° (H),60° (V)	120° (H),60° (V)	120° (H),60° (V)	120° (H),60° (V)
	Grey Scale(bit)	16	16	16	16	16
	Refresh Rate(Hz)	3840	3840	3840	3840	3840
	Consumption(w/sqm)	800	800	650	600	800
	Ave.Power Consumption (w/sqm) 300		300	250	250	300
	Cabinet Size(mm)	1024x768x100	960 x 960 x100	960 x 960 x100	960 x 960 x100	960 x 960 x100
	Cabinet Weight( ± 0.25Kg)	28	28	28	28	28
	Waterproof Level	IP65	IP65	IP65	IP65	IP65
	Working Environment	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
	Cabinet Material	Magnesium Alloy				
	Input Voltage(V)	AC110V~220V+/-10%				
	Input Frequency(Hz)	60				
	Working Temperature(° C)	-20℃~+60℃				
	Operation Humidity(RH)	10~95%				
	Life Span(H)	100000				
	Maintainence mode	Rear /Frontal				

SHENZHEN HANMEI PHOTOELECTRIC CO.,LTD

Tel: 0086-755-28050979      Email: INFO@HANMEIGRP.COM

Web : http://www.hanmeigrp.com

SHOWING THE BEAUTY OF THE WORLD

Sports series


High brightness multi-function outdoor Led display for advertising




SHENZHEN HANMEI PHOTOELECTRIC CO.,LTD

SHOWING THE BEAUTY OF THE WORLD

Structures

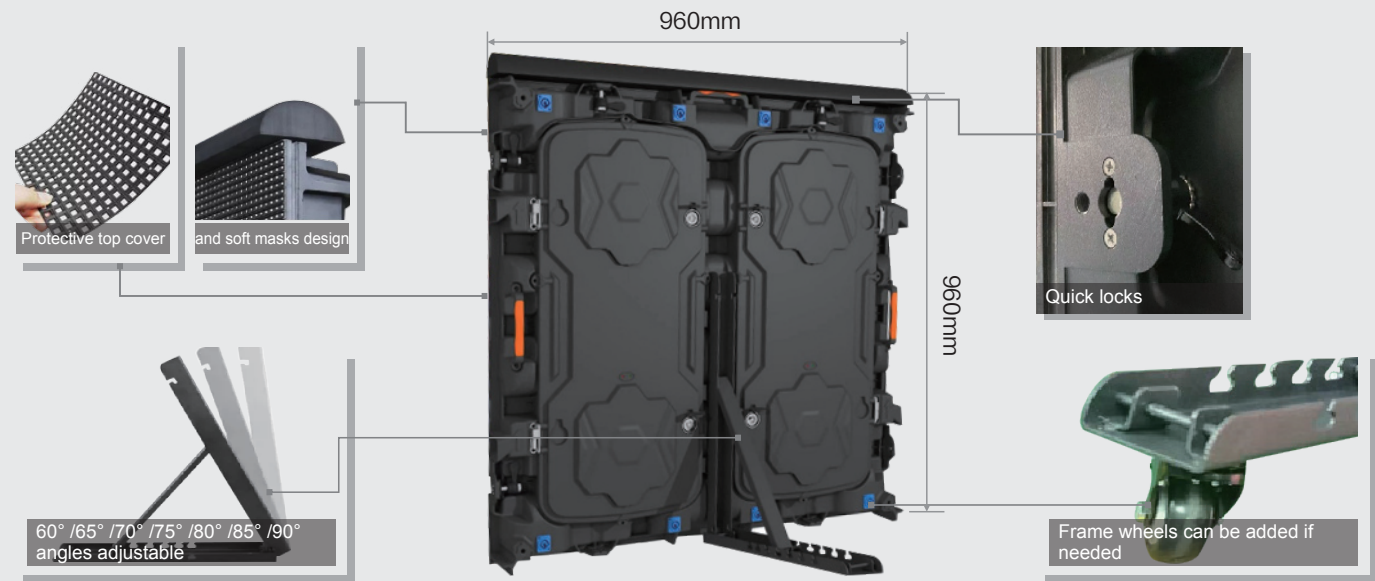

Applications

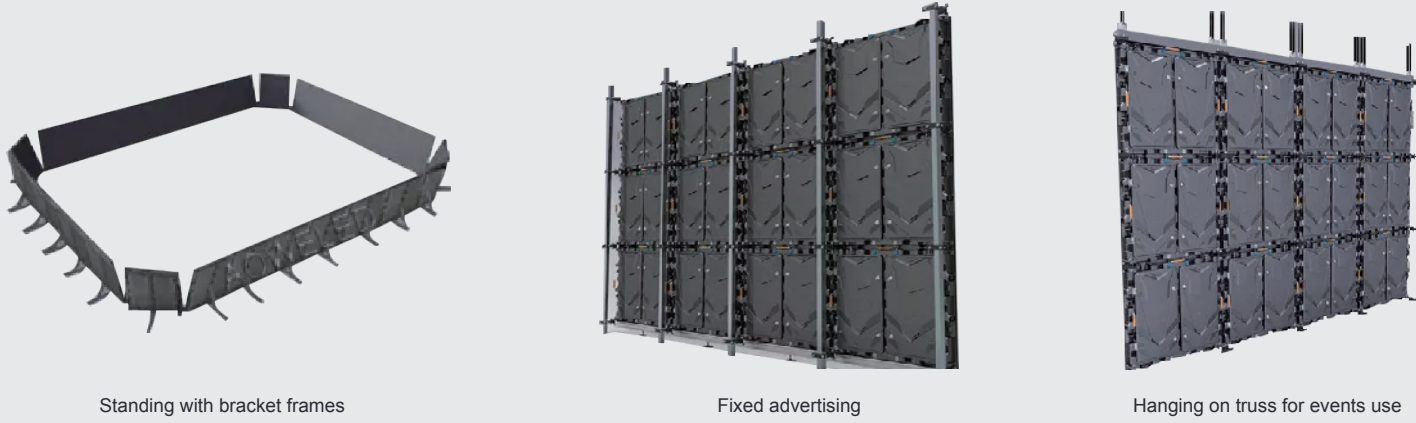

- High brightness and high refresh rate.
- High IP level IP65 ideal for outdoor application.
- Multi-function for standing /hanging /fixed stacking installation.
- quick locks for fast assembling and Maintenance

