


Transparent LED screen

High transparency of maximum 71%, Fixed installation / Rental assembling
Energy-saving and environment-friendly

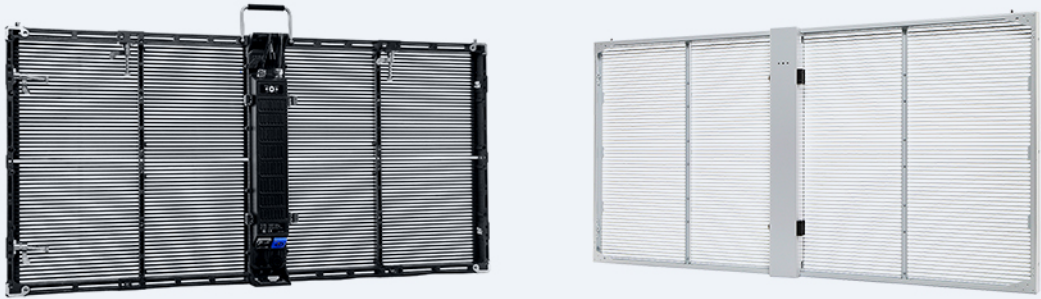

Structures and Features

- 

Light
- 


Slim
- 

IP65
- 

Large
veiw angle
- 


High
brightness
- 

Easy
Maintenance

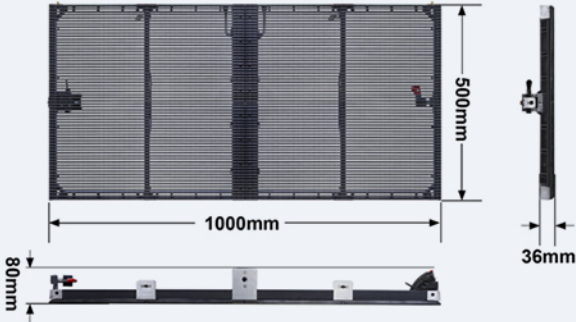

Curved screen optional

By adding the radian locks, each cabinet can be -15°~15°adjustable
Circle screen with 360°full side visual effect

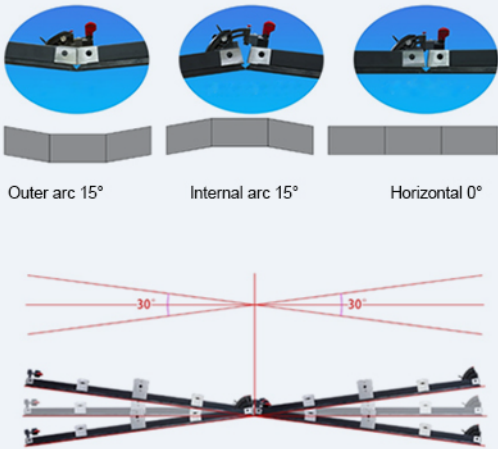

Applications

Transparent LED screens are widely in commercial advertising:
glass curtain wall,ceiling in retail shops ,shopping malls, exhibition centre,hotel etc.



Model	HM3-7	HM-5.2	HM-10.4	HM-15.6
Pixel Pitch(mm)	H:3.9 V:7.8	H:5.2 V:10.4	H:10.4 V:10.4	H:15.6 V:15.6
Transparency Rate	53%	58%	58%	80%
Resolution(dot/ m²)	32768	18432	9216	4096
Cabinet Resolution	256x64	192x48	96x48	64x32
Weight(Kg/ m²)	15	15	15	15
Refresh(Hz)	3840	3840	3840	3840
Scan Mode	1/8	1/4	1/2	Static
LED Type	SMD1921	SMD1921	SMD2727	SMD2727
Brightness(cd/ m²)	≥ 4500			≥ 5500
Lamp Life Span	≥ 100 000 hours			
Pixel Compose	RGB all in one			
Grey Scale	14bit			
Max Power Consumption(W/m²)	800			
Ave. Power Consumption(W/m²)	260			
LED Control System	NOVA			
Connection & Control	WiFi / DVI / HDMI / DP / USB/RJ45 / Remote Internet control			
IP Level	IP65			
Input Power	AC100~240V 50/60Hz			
Module Input Power	DC4.7~5V ±0.2V			
Cabinet Size(mm)	1000x500x80			
Cabinet Material	Die Casting			
Maintenance	Front/ Rear Maintenance			
Working Tempareture and humidity	Temperature : -10~40℃ ; Humidity: 10%-90%, non-condensing			
Installation	Hanging （vertical 20pcs cabinet） / Stacking / Fixed installation			