



Protective Technology


Led lamps are protected with gluing
Modules are covered by PC cover
Anti-skid, anti-knock, anti-scratch

Easy installation and frontal Maintenance

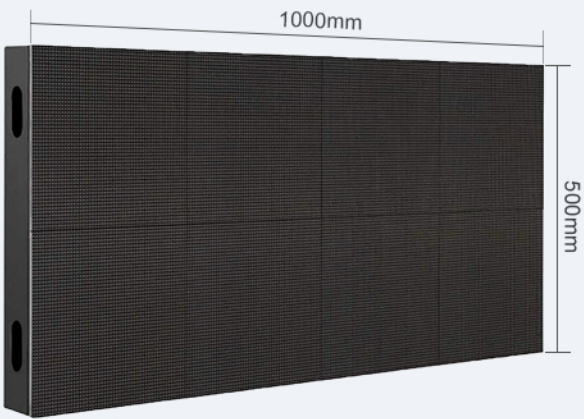

Intelligent Interactive Function

Players can interact with the dance floor led display
Applications: Stage、concerts 、club、 live shows、 party etc.

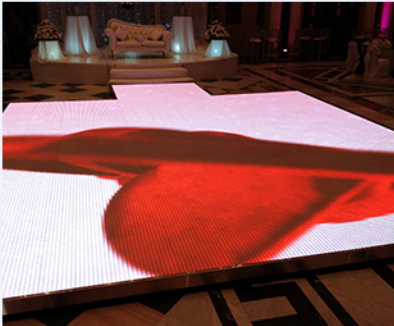

Mode	P 3.91(Indoor)	P 3.91(Outdoor)	P 4.81(Outdoor)
Pixel Pitch (mm)	3.91	3.91	4.81
Pixel Density (dot/m2)	65536	65536	43264
LED Type	SMD2121	SMD1921	SMD1921
Module Size (mm)	250*250	250*250	250*250
Cabinet Size (mm)	W500*H1000	W500*H1000	W500*H1000
Brightness (CD/m²)	1200	4500	4500
Maximum Power Consumption (w/m²)	700	700	700
Average Power Consumption(w/m²)	240	240	240
Horizontal Viewing Angle (Deg)	140	140	140
Vertical Viewing Angle (Deg)	120	120	120
Grey Scale (bit)	16	16	16
Refresh Rate (Hz)	3840	3840	3840
Input Voltage (V)	AC110-240V	AC110-240V	AC110-240V
Input Frequency (Hz)	60	60	60
Working Temperature(°C)	-20°C ~ +65°C	-20°C~ +65°C	-20°C ~ +65°C
Working Humidity (RH)	< 95%	< 95%	< 95%
Angle Adjustment	Optional	Optional	Optional
Waterproof Level	IP43	IP65	IP65
Working Environment	Indoor	Outdoor	Outdoor