

Parameters

Item		Parameters				
Modules	Model	P2.6 indoor	P2.97indoor	P3.91indoor	P3.91outdoor	P4.81 outdoor
	Pixel Pitch (mm)	2.6	2.97	3.91	3.91	4.81
	Physical Density (dot/m²)	147456	112896	65536	65536	43264
	LED Arrangement	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
	LED Type	SMD1515	SMD2121	SMD2121	SMD1921	SMD1921
	Module Size (mm)	250*250	250*250	250*250	250*250	250*250
	Module Resolution (dot)	96*96	84*84	64*64	64*64	52*52
Main Technical Parameters	Viewing Angle	160/160	160/160	160/160	160/160	160/160
	Grey Scale(bit)	16	16	16	16	16
	Refresh Rate(Hz)	3840	3840	3840	3840	3840
	Consumption(w/sqm)	550	480	400	600	580
	Consumption(w/sqm)	200	170	150	200	180
	Cabinet Size(mm)	W500*H500*75 W500*H1000*75	W500*H500*75 W500*H1000*75	W500*H500*75 W500*H1000*75	W500*H500*75 W500*H1000*75	W500*H500*75 W500*H1000*75
	Cabinet Weight(± 0.25Kg)	8.5/13.5	8.5/13.5	8.5/13.5	8.5/13.5	8.5/13.5
	Waterproof Level	IP43	IP43	IP43	IP65	IP65
	Working Environment	Indoortt	Indoor	Indoor	Outdoor	Outdoor
	Cabinet Material	Diecasting Aluminum				
	Input Voltage(V)	AC110V~220V+/-10%				
	Input Frequency(Hz)	60				
	Working Temperature(° C)	-20℃~+60℃				
	Operation Humidity(RH)	10~95%				
	Life Span(H)	100000				
	Control mode	Synchronous				
	Angle Adjustment	Optional				
	Maintainence mode	Rear/Frontal				
	Installation Type	Rental/Fixed				

SHENZHEN HANMEI PHOTOELECTRIC CO.,LTD

Tel: 0086-755-28050979 Email: INFO@HANMEIGRP.COM

Web : http://www.hanmeigrp.com

SHOWING THE BEAUTY OF THE WORLD

WIN SERIES


The best selling product for indoor & outdoor



SHENZHEN HANMEI PHOTOELECTRIC CO.,LTD

SHOWING THE BEAUTY OF THE WORLD

Features

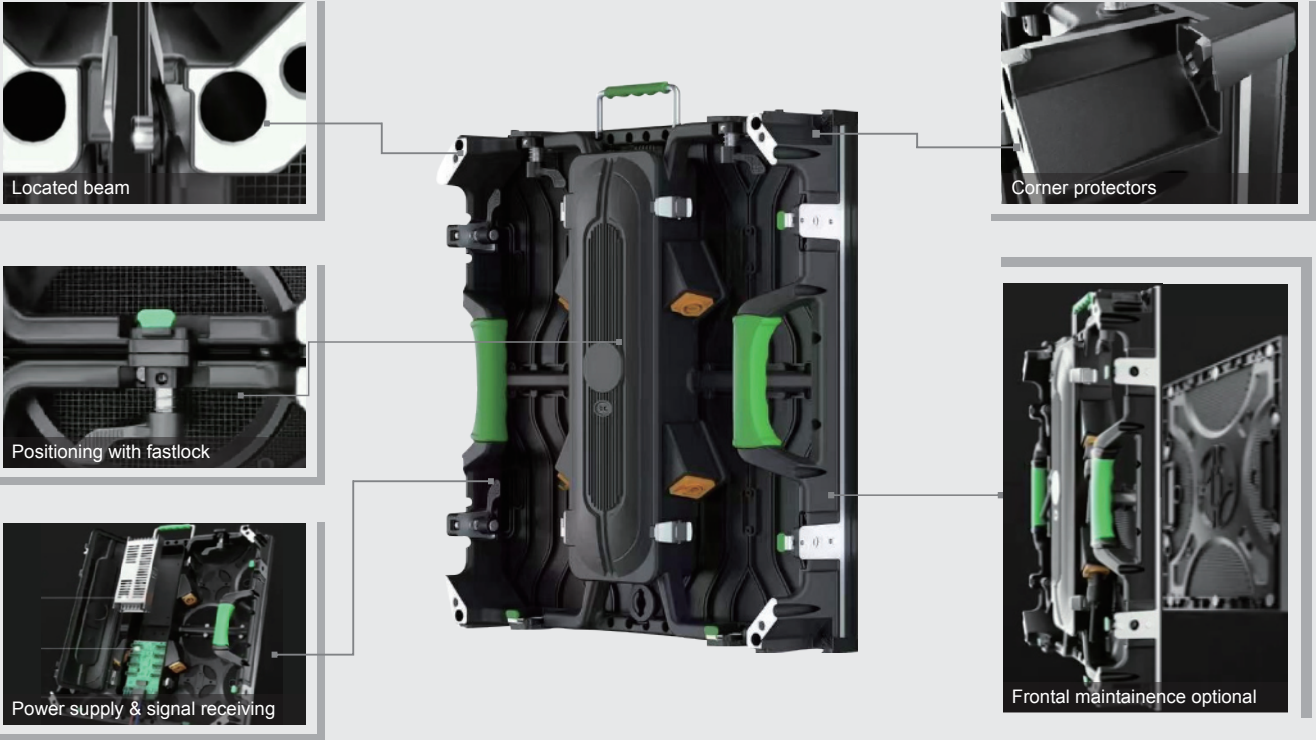

- Die-casting aluminum cabinet,more stable and durable
- Located beam & fast locks easy for assembling
- High refresh rate 3840 with perfect vision effects
- '-15°--15°angle adjustment possible
- Frontal maintainence oppotional
- Flw signal and power cable,connect the control card and PCB board
- Over 10000 sqm sold around the world



Structures

